


# Mounting aluminium bracket

## SOG® + SOG® II type F

### for Thetford C250/C260

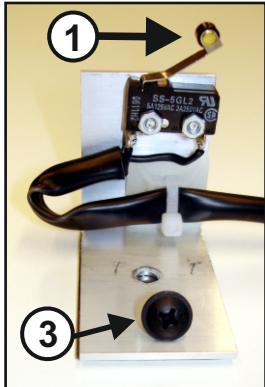

#### Stick Aluminium bracket:

Before sticking, clean the mounting surface on the sheet metal wall with methylated spirit.

Pull off adhesive foil protection to stick the aluminum bracket with the micro-switch.

The aluminum bracket must be bonded in so that the guide roller ① of the micro-switch is located on the rear edge of the slider opening bar.

The upper horizontal limb of the aluminium bracket must be on the plastic housing ②.

**NOTE:** The power supply is interrupted when the switch is pressed down, with the result that the fan is only switched on when the slider is open.

The aluminum bracket must also be secured with the Phillips screw ③ 3.9 x 9.5.

Screw the Phillips screw out through the 5 mm hole of the service compartment with a cordless screwdriver without pre-drilling. This is possible because the plastic wall is double-sided.

**ATTENTION: do not use a longer screw.**

